




D054A 显示控制仪表 Display control instrument

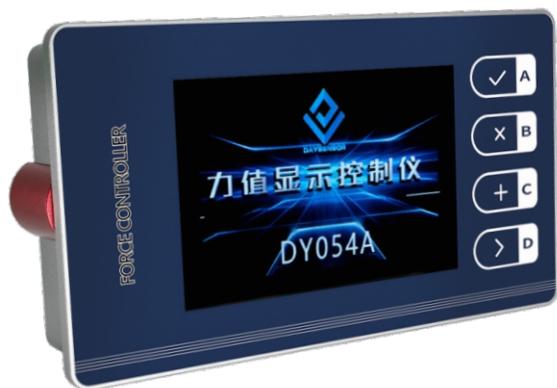

外形尺寸 External Dimension

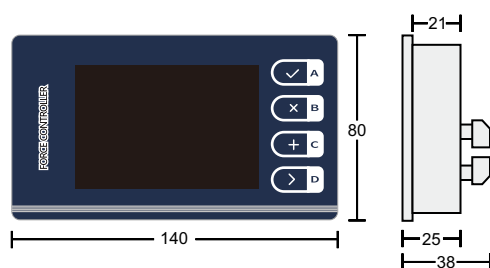

端口介绍 Port introduction

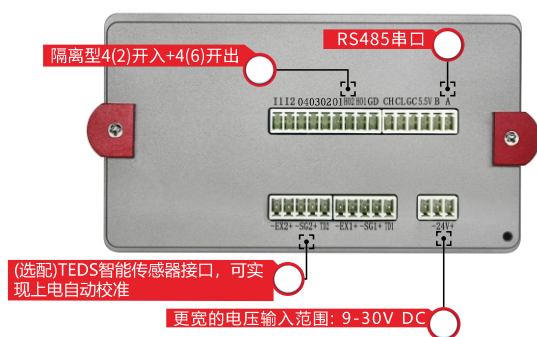

仪表界面 Instrument interface



★进入子操作界面后按键功能改变, 请阅读详细说明书中各界面具体操作方法。

产品综述 Product Reviews


特性:

DY054A仪表配置1个RS485串口。RS485执行MODBUS-RTU协议。ASC主动上传和HEX快速主动上传协议。MODBUS协议支持03读命令和10H写命令。主动上传协议提供最小延迟最快速度的主动上传协议。

Characteristic:

Dy054a instrument is equipped with one RS485 serial port. RS485 implements MODBUS-RTU protocol, ASC active upload protocol and hex fast active upload protocol. Modbus protocol supports 03 read command and 10h write command. Active upload protocol provides the minimum delay and the fastest active upload protocol.

安装示意图 installation diagram

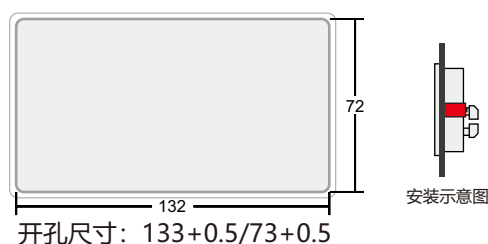


开孔尺寸: 133+0.5/73+0.5



技术指标 Technical index

- 综合精度优于0.1%, 非线性优于0.01%
- 高精度采集 精度优于0.01%
- 模拟输入信号范围3.0mV/V
- 高速采集可达到1200次/s
- 显示分度9999.99
- 20~70°C 相对湿度 < 90% (无结露)
- 供电电压10-30V DC 常用(24V DC)

仪表界面 Instrument interface

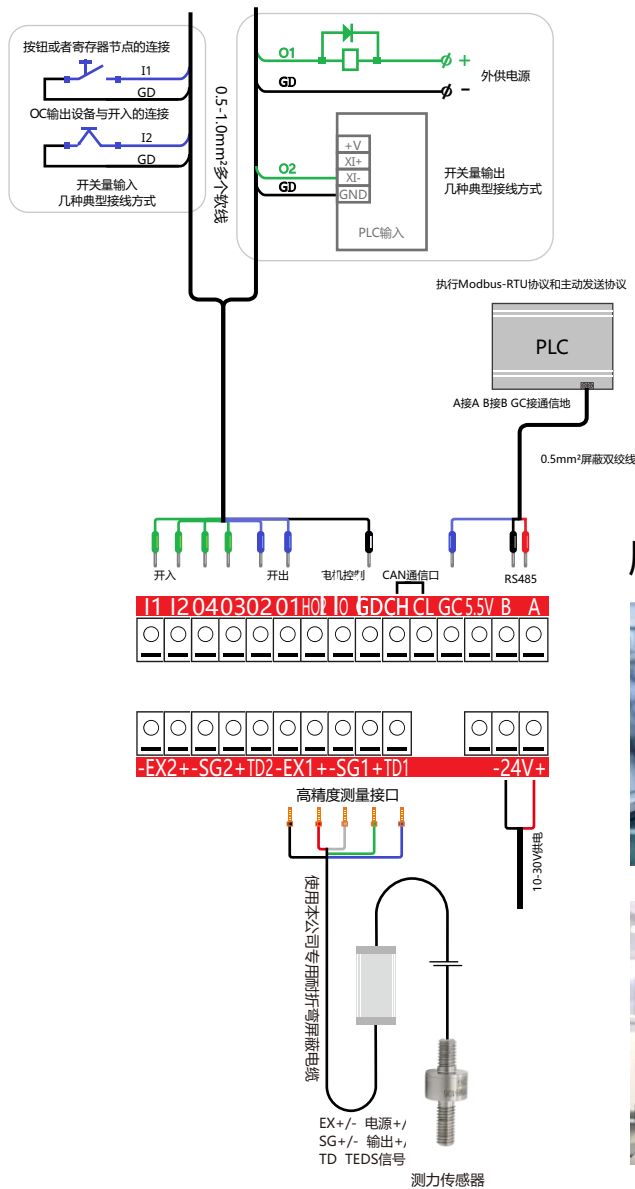

应用领域 Application

